




Quality products...unequalled Service

## SLOTTED DRAIN PIPE

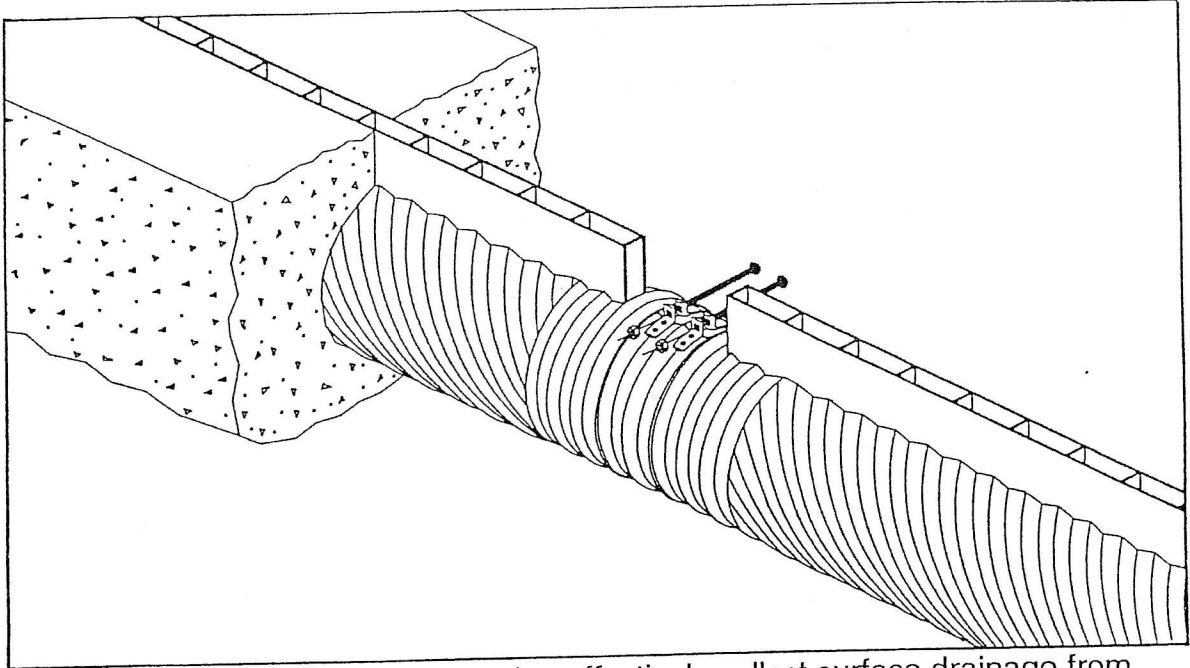

**Slotted Drain Pipe** is designed to effectively collect surface drainage from flat slope areas, sage inlets, or curb and gutter installations.

### PRODUCT DETAILS

**Slotted Drain Pipe** is manufactured from Corrugated Steel Pipe and is available in 12 inch through 30 inch diameters in 16 gauge or 14 gauge. Standard slot heights are 2½ inches and 6 inches. Other heights are available on request where special designs require. In areas of high pedestrian or bicycle traffic an expanded metal mesh can be installed on top of the slot to prevent shoe heels or bicycle tires from entering or being caught. The standard 20 foot lengths of **Slotted Drain Pipe** are joined by using the standard connecting bands for Corrugated Steel Pipe. A complete line of fittings and accessories are available just as with our standard Corrugated Steel Pipe. All components are galvanized.

#### Midwest Locations

Jefferson City, Missouri   Columbia, Missouri   Maryville, Missouri  
Monmouth, Illinois   Havana, Illinois   Evansville, Wisconsin   Albert Lea, Minnesota

#### Southern Location

Clearwater, Florida

## INSTALLATION

When properly installed, **Slotted Drain Pipe** will provide an attractive, safe, and durable drainage system.

After the trench is prepared the lengths of **Slotted Drain Pipe** are placed, aligned, and banded together. Care should be take to make sure that slot is level to grade as well as in the proper longitudinal alignment. The pipe is then encased in concrete or lean concrete grout up to the top of the pipe. The finish course or pavement is then installed up to the top of the slot.

Metal Culverts' sales and expediting staff can assist you with special manufacturing or installation needs.

## STANDARD DETAILS SLOTTED DRAIN PIPE


<b>AVAILABLE DIAMETERS:</b>	12 inch through 30 inch
<b>AVAILABLE THICKNESS:</b>	16 gauge and 14 gauge
<b>STANDARD SLOT HEIGHTS:</b>	2 1/2 inches and 6 inches
<b>SLOT WIDTH:</b>	1 3/4 inches inside
<b>RECOMMENDED CONNECTORS:</b>	Standard annular bands
<b>GRATING:</b>	Expanded metal mesh when required (at extra cost)

## STANDARD SPECIFICATIONS

<b>ASTM A760</b>	Corrugated Steel Drainage Pipe
<b>AASHTO M36/M36M</b>	Corrugated Steel Drainage Pipe
<b>ASTM A36/A36M</b>	Structural Steel Hot Rolled Shapes
<b>ASTM A123</b>	Galvanizing for Structural Fabricated Shapes



Quality products...unequalled Service

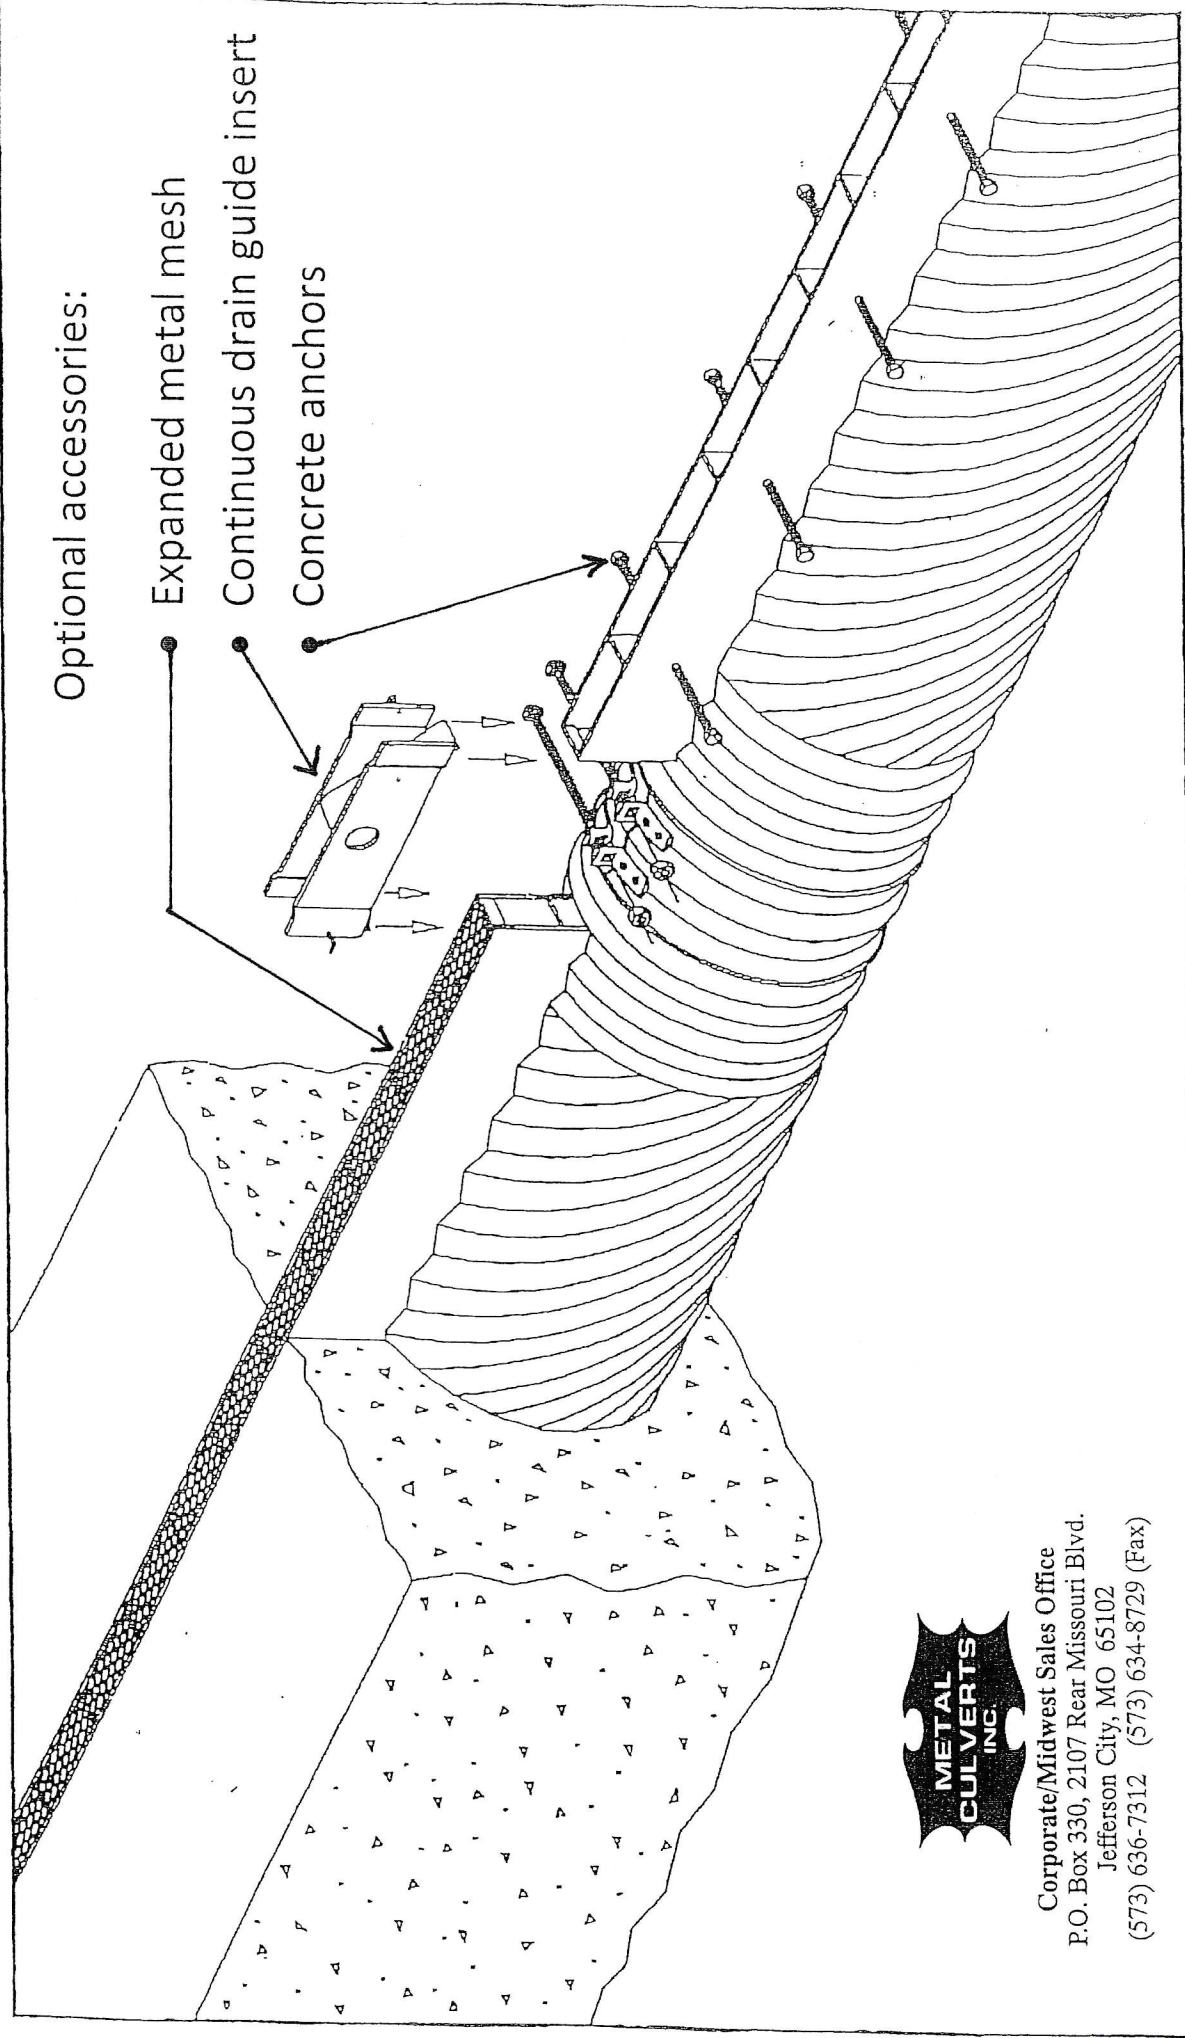

Optional accessories:

Expanded metal mesh

Continuous drain guide insert

Concrete anchors



Corporate/Midwest Sales Office  
P.O. Box 330, 2107 Rear Missouri Blvd.  
Jefferson City, MO 65102  
(573) 636-7312 (573) 634-8729 (Fax)